



HSD17 Home StandBy Diesel Generator

Generator Set rating

120/240 Volts Single phase
KW output, 60Hz, PF = 1.0
Standby Output 17 KW
Amperage 142/71A
Prime Output 15KW
Amperage 124/62A
Sound Level.
@ 23 ft Unloaded 70 dBA
Fuel Tank
Capacity 23 gal.

AC Generation Equipment

is our business at GENMAC. Our AC power systems offer a first-rate solution to requirements for Reliable, High Quality Electrical Power for the Residential owner.

All units are:

- 100% full load tested
- Performance supported by prototype testing
- Capacitive Regulated Generator for exceptional motor starting capability and high reliability



Product Features

System Reliability and Longevity

begin with design experience and integrity. GENMAC has been producing Generator Sets for over 20 years. The company is situated in the area world renown for automotive and electromechanical manufacturing. This has allowed us to assemble a staff of design and manufacturing personnel who are second to none. The

knowledge and experience in designing and manufacturing with state-of-the art power generation equipment is built into our complete line of generator sets.

Single Source Responsibility:

Product service, support and parts are available through the GENMAC network of distributors.

Accessories and Flexibility

are designed into GENMAC's generator sets at the factory level to meet residential application needs.

The GENMAC mission

To provide the world with safe, reliable, high quality power generation equipment to allow anyone in the world to realize their full potential.



HSD17 Home StandBy Diesel Generator

Standard Equipment

- 4 Cycle Liquid cooled diesel engine
- Battery Charging alternator
- Single stage dry type air cleaner
- Integral Muffler with rain cap
- Sound attenuated Outdoor Enclosure
- Glow plugs
- 12VDC engine electrical systems
- 12V starting motor
- Low fuel switch
- Dirty Air Filter switch
- Capacitive Regulated Brushless Alternator
- Tropical Treated Alternator
- Steel base with vibration isolators between engine, generator and the base.
- Under Base stub up area for hidden wiring access
- Integral Control Box behind a locked door
- Mainline circuit breakers located in the lockable Control Box
- Single connection area for main AC terminals and all control wiring
- On board Utility powered AC battery charger
- Utility Present Light
- Battery rack tie down bar and Cables
- In Base Fuel Tank and gauge
- In Base fuel inlet.
- In Base Oil drain
- In Base Coolant drain
- All steel parts are powder paint coated and tropical treated
- Corrosion resistant hardware
- Interior light
- Microprocessor based, fully programmable auto start control panel with metering and security
 - Integral programmable ATS control logic built into System controller
 - Exercise without load capability for unattended operation
 - Digital read out control system with the following accessible standard displays:
 - Utility Voltage L-L
 - Generator Voltage L-L
 - Generator Frequency
 - Battery Voltage
 - Operating hours
 - Additional information available on the controller display are:
 - ATS switch position
 - Engine run / on
 - Generator run / on
 - Error in code detailed on the controller face
 - Test, manual, automatic and Reset buttons
 - Remote manual switching of ATS from the control panel
 - Shut down:
 - High engine temp
 - Low oil Pressure
 - Cranking Failure
 - Over speed
 - High voltage generator
 - Low voltage generator
 - Under frequency
 - Warning:
 - High Battery Voltage
 - Low Battery Voltage
 - Dirty Air Filter
 - Common alarm relay output
 - Exceed programmable Maintenance hours warning error code
- Automatic test function
- Low fuel shutdown to prevent emptying fuel system
- Thermostatically controlled Coolant Heater

Options:

Complete remote control and operation by:

- Direct PC interface able with cable and software
- Modem capable for remote control over dedicated phone line
- Wireless hook up to RS232 port Capable
- Remote Alarm Annunciator
- Automatic transfers switches for any application
- External Emergency Stop
- Extended Run time, under Base tanks
- Will operate with Standard 2 wire ATS
- 2 Programmable Digital inputs for shut down or warning
- Capable of external start / stop operation
- Capable of single phase 110V operation
- Capable of operating more than one ATS
- Project engineering help available for "Specials"





HSD17 Home StandBy Diesel Generator

Technical Specifications Model HSD 17

Engine:	Generator:																																																																		
<table style="width: 100%; border: none;"> <tr><td style="width: 30%;">Manufacturer</td><td>Lombardini</td></tr> <tr><td>Model</td><td>LDW 2004</td></tr> <tr><td>Intake System</td><td>Naturally Aspirated</td></tr> <tr><td>Cylinders</td><td>In-line 4</td></tr> <tr><td>Displacement</td><td>2068 cc</td></tr> <tr><td>Bore and Stroke</td><td>88 X 85mm</td></tr> <tr><td>Compression ratio</td><td>22.1:1</td></tr> <tr><td>HP</td><td>28.6HP @ 1800rpm</td></tr> <tr><td>Governor</td><td>Mechanical</td></tr> <tr><td>Cooling system</td><td>Pressurized, Closed recovery</td></tr> <tr><td>Lubrication System</td><td>Pressurized oil</td></tr> <tr><td>Oil Capacity w/ Filter</td><td>1.4 gal.</td></tr> <tr><td colspan="2"> Fuel Consumption</td></tr> <tr><td>(at 100% load)</td><td>1.9 gal per hour</td></tr> <tr><td>Fuel Tank Capacity</td><td>23 Gal</td></tr> <tr><td>Cooling System Cap.</td><td>2.4 gal.</td></tr> <tr><td colspan="2">.</td></tr> </table>	Manufacturer	Lombardini	Model	LDW 2004	Intake System	Naturally Aspirated	Cylinders	In-line 4	Displacement	2068 cc	Bore and Stroke	88 X 85mm	Compression ratio	22.1:1	HP	28.6HP @ 1800rpm	Governor	Mechanical	Cooling system	Pressurized, Closed recovery	Lubrication System	Pressurized oil	Oil Capacity w/ Filter	1.4 gal.	 Fuel Consumption		(at 100% load)	1.9 gal per hour	Fuel Tank Capacity	23 Gal	Cooling System Cap.	2.4 gal.	.		<table style="width: 100%; border: none;"> <tr><td style="width: 30%;">Generator MFG.</td><td>Sincro</td></tr> <tr><td>Type</td><td>KS140 L M4BL</td></tr> <tr><td>Model</td><td>20kVA (240V – 60Hz)</td></tr> <tr><td>Speed</td><td>1800 RPM</td></tr> <tr><td>Rated Voltage</td><td>120/240 60Hz</td></tr> <tr><td>Rated Power</td><td>20.0 KVA</td></tr> <tr><td>Voltage Accuracy</td><td>Approx. +/- 5%</td></tr> <tr><td>Motor Starting kVA</td><td></td></tr> <tr><td>(At 35% Dip, 100% voltage recovery)</td><td>35.2 SkVA</td></tr> <tr><td>Over speed</td><td>2160 RPM</td></tr> <tr><td>THD</td><td>Approx. 5%</td></tr> <tr><td>Protection</td><td>IP 33</td></tr> <tr><td>Cooling flow</td><td>5.1 Cubic Meters / min</td></tr> <tr><td colspan="2"> Insulation Class</td></tr> <tr><td>Stator</td><td>F</td></tr> <tr><td>Rotor</td><td>H</td></tr> </table>	Generator MFG.	Sincro	Type	KS140 L M4BL	Model	20kVA (240V – 60Hz)	Speed	1800 RPM	Rated Voltage	120/240 60Hz	Rated Power	20.0 KVA	Voltage Accuracy	Approx. +/- 5%	Motor Starting kVA		(At 35% Dip, 100% voltage recovery)	35.2 SkVA	Over speed	2160 RPM	THD	Approx. 5%	Protection	IP 33	Cooling flow	5.1 Cubic Meters / min	 Insulation Class		Stator	F	Rotor	H
Manufacturer	Lombardini																																																																		
Model	LDW 2004																																																																		
Intake System	Naturally Aspirated																																																																		
Cylinders	In-line 4																																																																		
Displacement	2068 cc																																																																		
Bore and Stroke	88 X 85mm																																																																		
Compression ratio	22.1:1																																																																		
HP	28.6HP @ 1800rpm																																																																		
Governor	Mechanical																																																																		
Cooling system	Pressurized, Closed recovery																																																																		
Lubrication System	Pressurized oil																																																																		
Oil Capacity w/ Filter	1.4 gal.																																																																		
 Fuel Consumption																																																																			
(at 100% load)	1.9 gal per hour																																																																		
Fuel Tank Capacity	23 Gal																																																																		
Cooling System Cap.	2.4 gal.																																																																		
.																																																																			
Generator MFG.	Sincro																																																																		
Type	KS140 L M4BL																																																																		
Model	20kVA (240V – 60Hz)																																																																		
Speed	1800 RPM																																																																		
Rated Voltage	120/240 60Hz																																																																		
Rated Power	20.0 KVA																																																																		
Voltage Accuracy	Approx. +/- 5%																																																																		
Motor Starting kVA																																																																			
(At 35% Dip, 100% voltage recovery)	35.2 SkVA																																																																		
Over speed	2160 RPM																																																																		
THD	Approx. 5%																																																																		
Protection	IP 33																																																																		
Cooling flow	5.1 Cubic Meters / min																																																																		
 Insulation Class																																																																			
Stator	F																																																																		
Rotor	H																																																																		
Generator Set																																																																			
<table style="width: 100%; border: none;"> <tr><td style="width: 30%;">Frequency variation</td><td>58.6 to 62.2 Hz</td></tr> <tr><td>Nominal Sound Level</td><td></td></tr> <tr><td>@ 23FT No Load</td><td>70dBA</td></tr> <tr><td>Dry Weight:</td><td>1,272 lbs.</td></tr> <tr><td>Basic footprint:</td><td>71 x 35 x 37.5inches</td></tr> <tr><td colspan="2"> De-rating Factors:</td></tr> <tr><td colspan="2">3.5% for every 1,000 ft above Sea Level</td></tr> <tr><td colspan="2">1.0% for every 10° F above 77° F</td></tr> </table>		Frequency variation	58.6 to 62.2 Hz	Nominal Sound Level		@ 23FT No Load	70dBA	Dry Weight:	1,272 lbs.	Basic footprint:	71 x 35 x 37.5inches	 De-rating Factors:		3.5% for every 1,000 ft above Sea Level		1.0% for every 10° F above 77° F																																																			
Frequency variation	58.6 to 62.2 Hz																																																																		
Nominal Sound Level																																																																			
@ 23FT No Load	70dBA																																																																		
Dry Weight:	1,272 lbs.																																																																		
Basic footprint:	71 x 35 x 37.5inches																																																																		
 De-rating Factors:																																																																			
3.5% for every 1,000 ft above Sea Level																																																																			
1.0% for every 10° F above 77° F																																																																			




HSD17 Home StandBy Diesel Generator

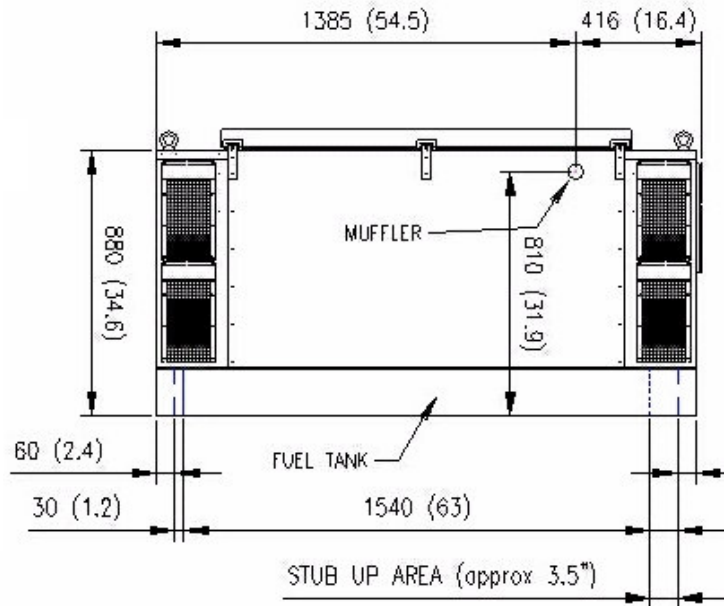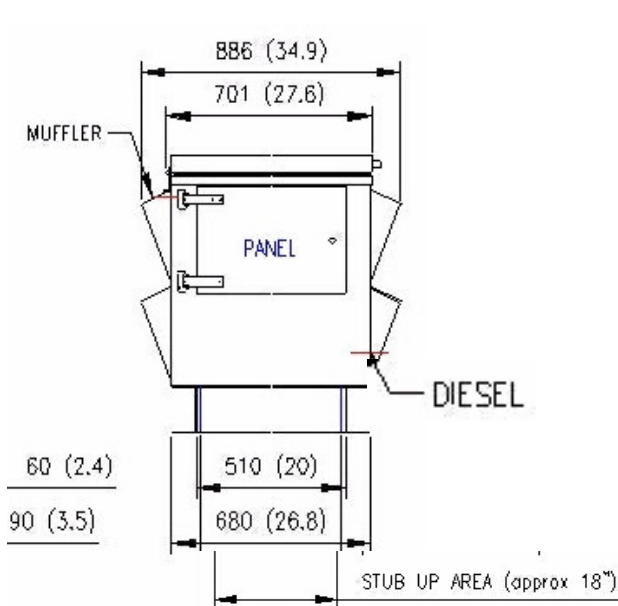

Optional Under Base Tanks

- Under Base tanks available to provide extended run capability
- Tank has identical foot print as system – Volume determines height
- Under base tanks require the removal of the in base tank

Part #	Description	Height
	UL, 50 gal. Double wall with Electronic fuel gauge	18.00"
	UL, 135 gal. Double wall with Electronic fuel gauge	36.00"

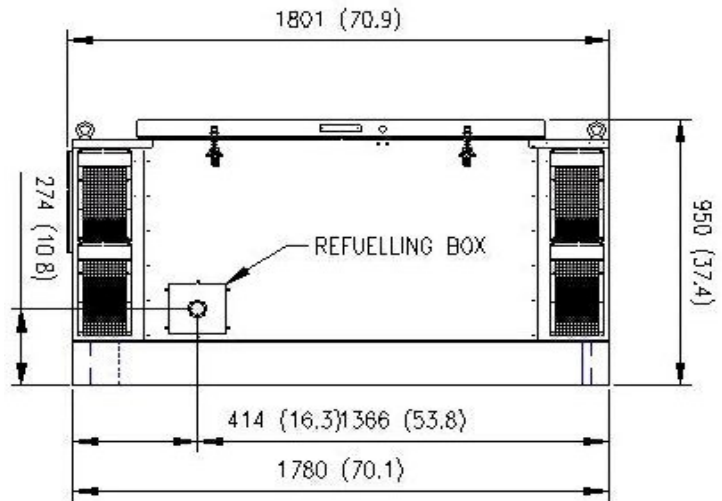

Mechanical Layout



12355 S.W. 129 Court # 1
 MIAMI, FL 33186
 Tel: (305) 254-4545
 Fax: (305) 254-4558
 Toll free (877) 254-4541
 Email: genmacusa@genmac-group.com
www.genmac-group.com

All Specifications are subject to change with out notice.
 Made in Italy

Distributed By